

Fig. 1

200

202	204	206	208	210	211	212
User Account Info (user id)	Application identification	Device identification	Device identification	current device id		password
user1	product1	device1	device2	-		psw1
user1	product2	device1	device3	device1		psw2
user2	product1	device4	device5	device5		psw3

Fig. 2

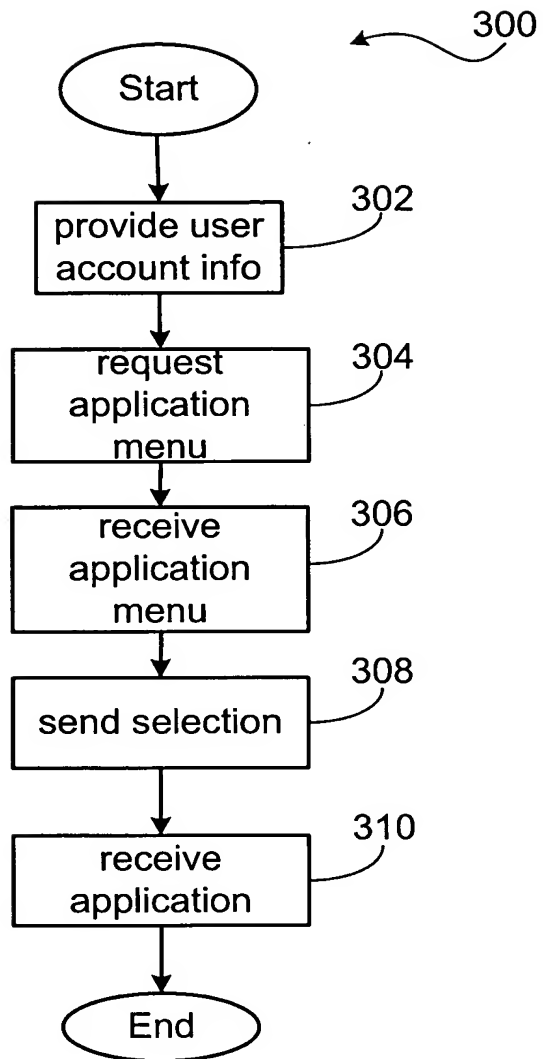


Fig. 3

4/9

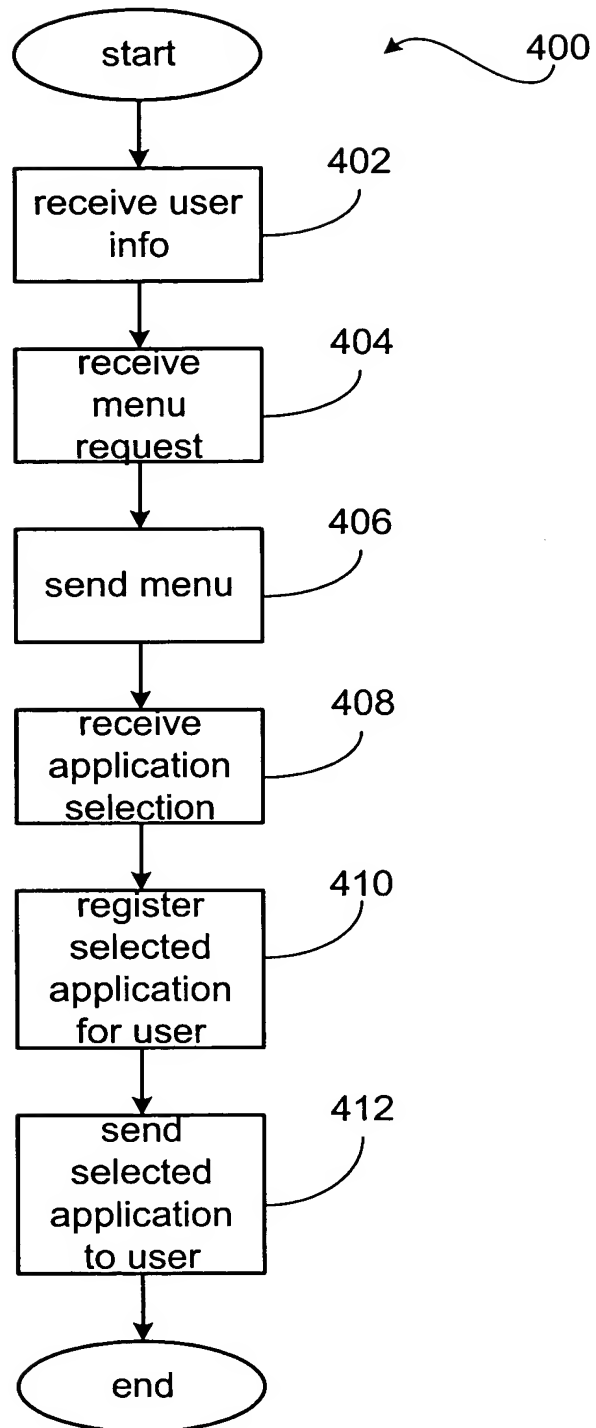


Fig. 4

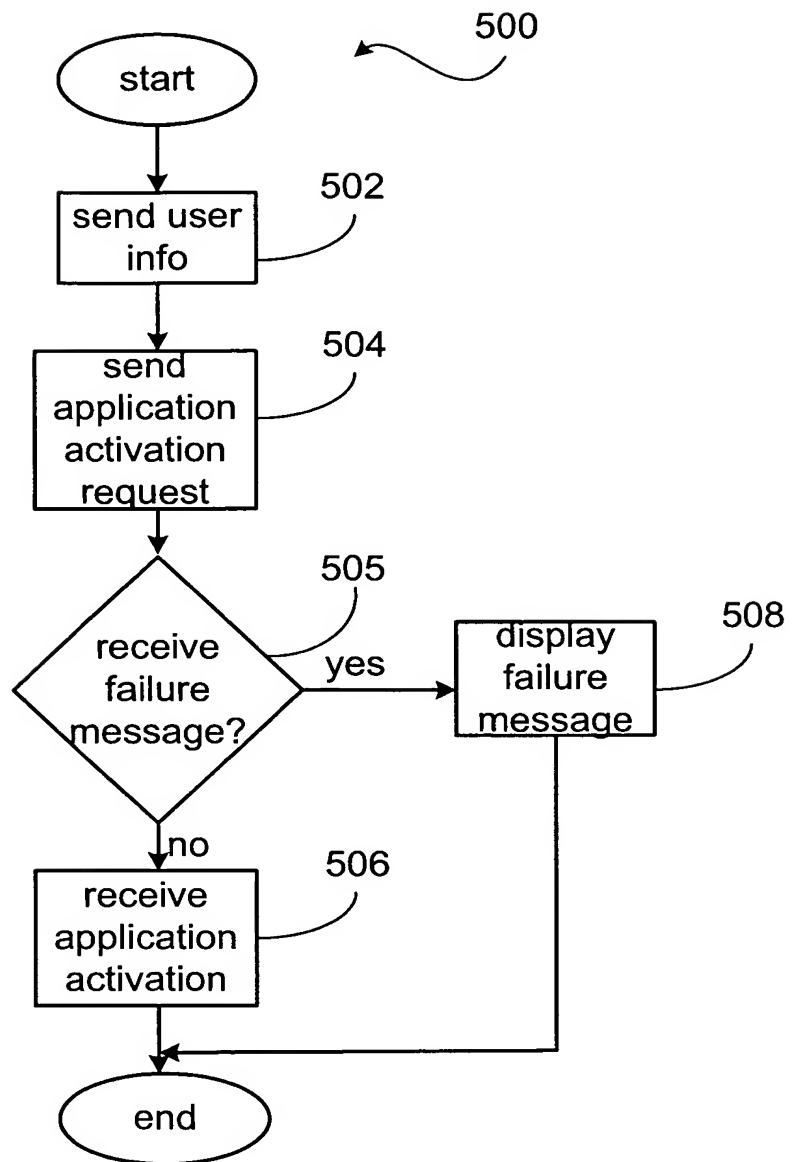


Fig. 5

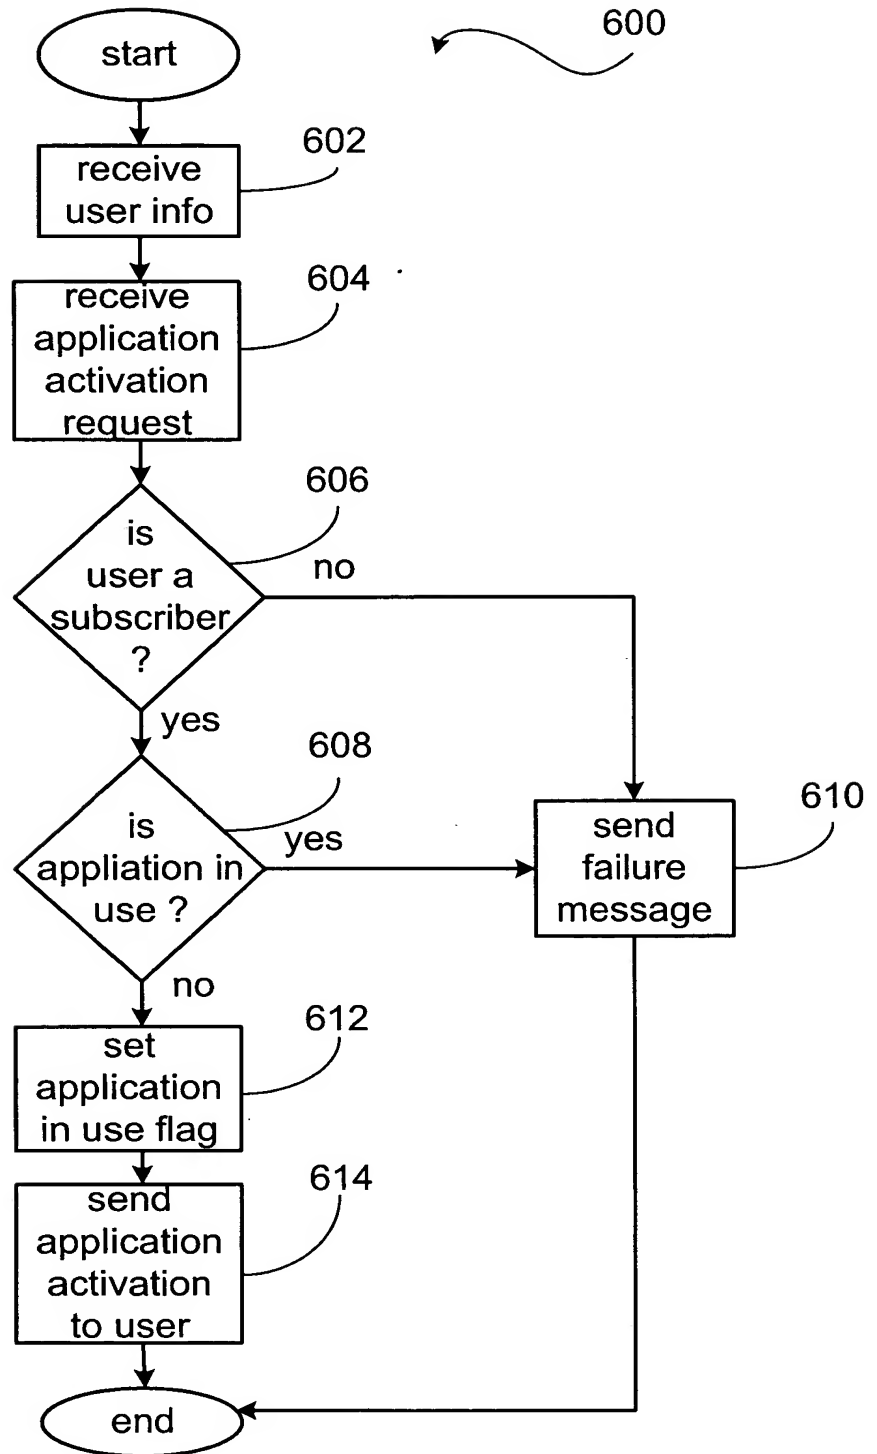


Fig. 6

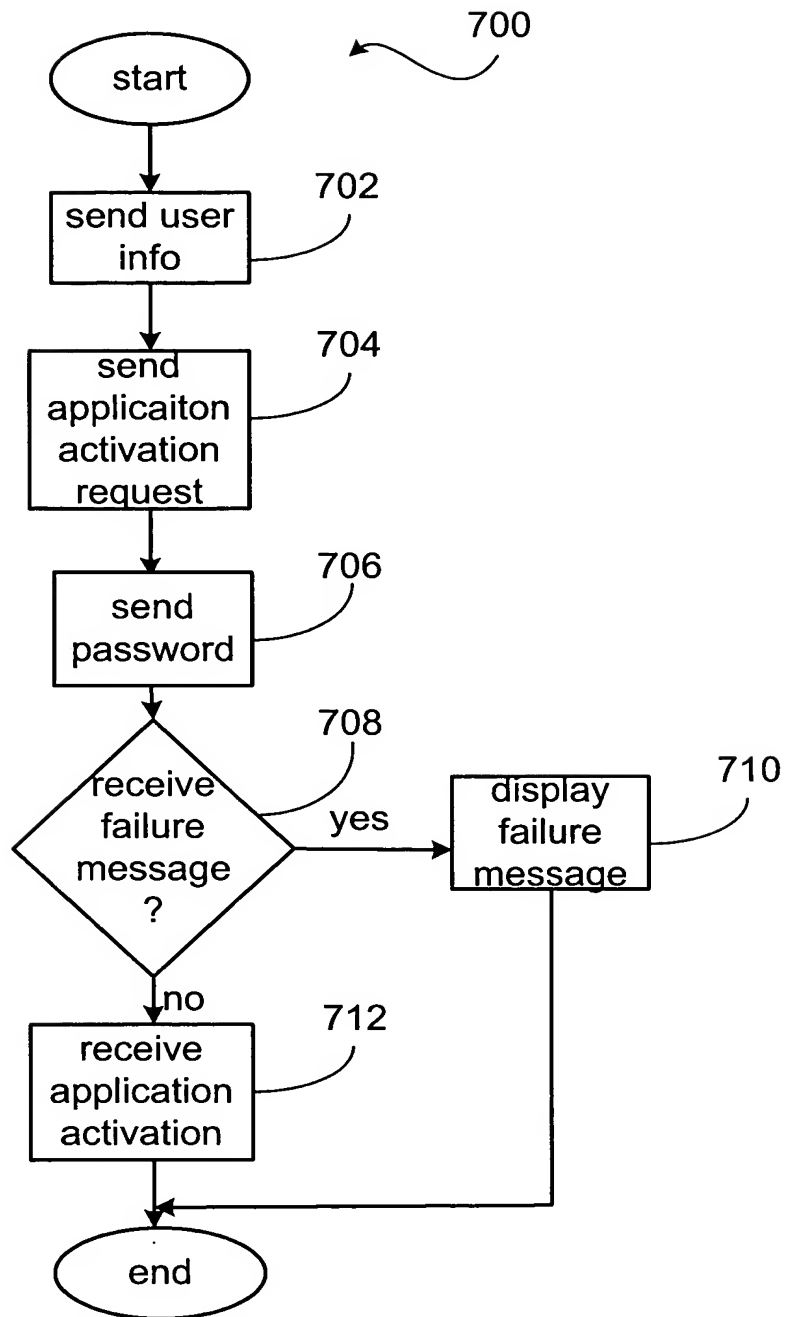


Fig. 7

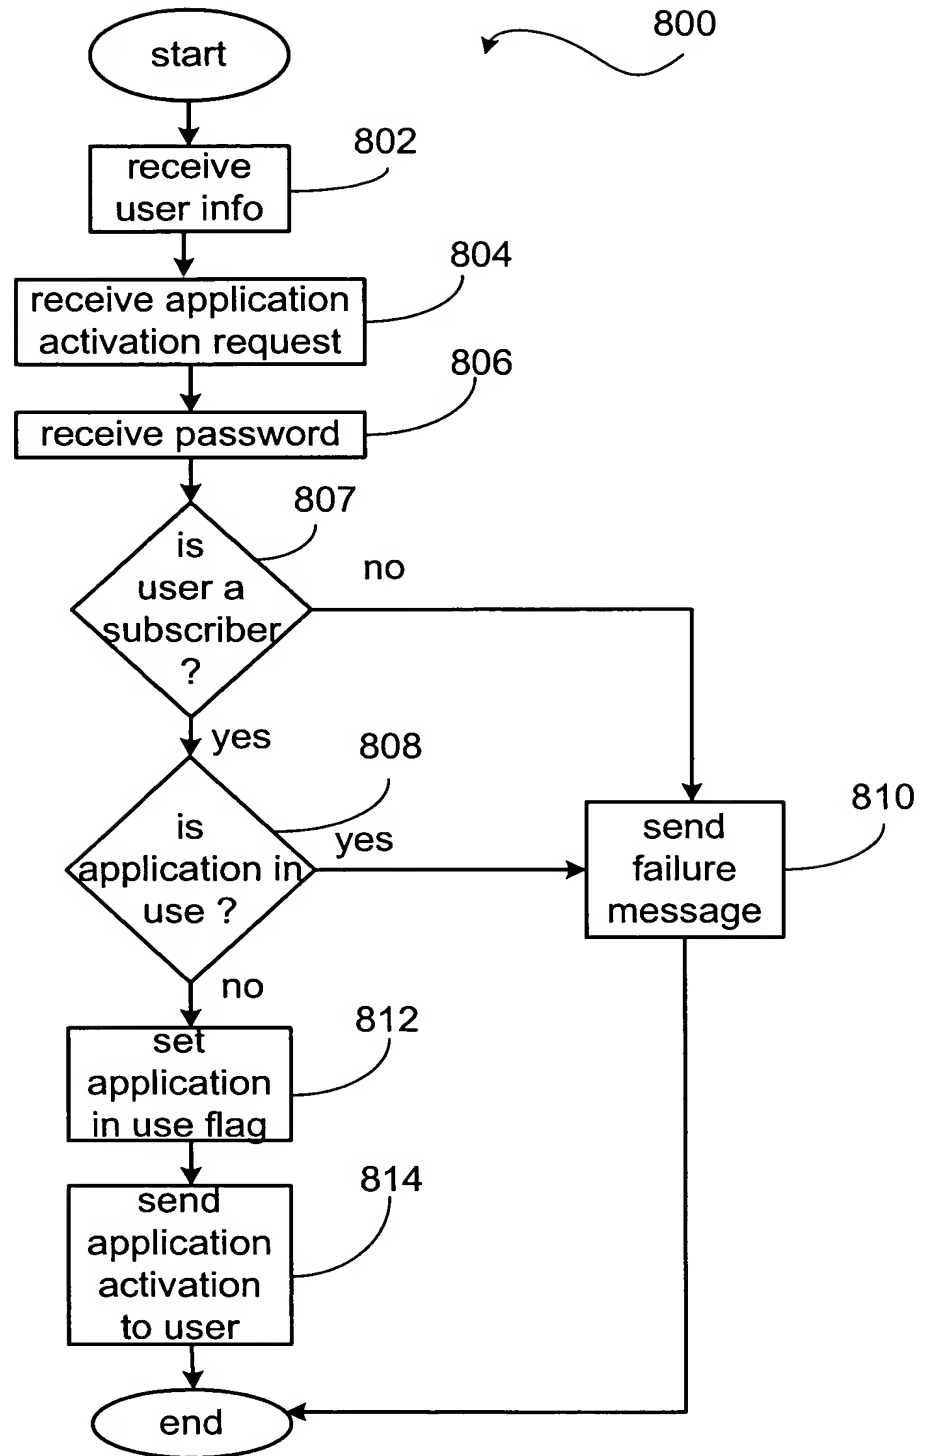


Fig. 8

The diagram shows a table with four columns and four rows. The first row contains headers: 'User Account Info (user id)', 'application identification', 'in-use', and 'password'. The subsequent three rows contain data: (user1, application1, free, psw1), (user1, application2, yes, psw2), and (user2, application3, yes, psw3). Labels with arrows point to various parts of the table: 900 points to the top right, 902 to the first header, 904 to the second header, 906 to the third header, 908 to the fourth header, and 910 to the right side of the data rows.

User Account Info (user id)	application identification	in-use	password
user1	application1	free	psw1
user1	application2	yes	psw2
user2	application3	yes	psw3

Fig. 9